



The Ultra•Strip III Sheet Label provides the highest detection and deactivation performance. The sheet format is intended for hand application.

Product Codes

ZLDRS1White
 ZLDRS2Mock Barcode
 ZLDRS5Black

Label Dimensions

label length45.21mm ± 0.5mm (1.78" ± 0.020")
 label width10.67mm ± 0.5mm (0.420" ± 0.020")
 label thickness
 (excluding liner)Maximum 1.89mm (0.074")
 label thickness
 (including liner)Maximum 2.00mm (.079")

Environmental Constraints

temperatureMaximum storage temperature not to exceed 50°C (122° F) for 96 hours at 80% RH.
 humidityUnaffected by 80% humidity at 50°C(122°F), up to 96 hours.
 shelf lifeTwo years from date of manufacture when labels are stored between 15°C -32°C (60°F - 90°F), 30 - 80% RH.

Note: warranty terms and conditions are as specified in the applicable Sales Agreement.



The design and production of the Ultra•Max label fully conforms to the EU Directive on the Restriction of the use of certain Hazardous Substances in electrical and electronic equipment "RoHS Directive (2002/95/EC)".




The Ultra Max label typically may be disposed of along with paper and plastic packaging and recycled as arranged by waste management services.

Sheet Specifications

labels per sheet108
 order multiple5000-unit case
 case weight2.76kg (6.07 lbs.)
 ext. carton
 dimensions27.9 x 20 x 11 cm (11 x 8 x 4.5")
 ext. cubic feet
 per case0.23
 cases per pallet140

Materials of Construction

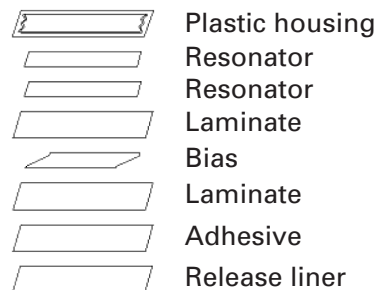

plastic housingPolystyrene/Polyethylene
 0.3mm (0.012") thick
 magnetic acoustic
 resonator (2)Proprietary resonant magnetic material. Amorphous alloy based on iron, containing nickel, cobalt, boron and silicon.
 laminateLow Density Polyethylene / Polyester / Polyethylene 0.127mm (0.0050")
 biasProprietary semi-hard magnetic material containing iron, nickel, and chromium.
 laminateLow Density Polyethylene/Polyester 0.119mm (0.0047")
 adhesiveDouble-coated, rubber-based adhesive 2.4 mil thick per side
 Minimum peel strength of 80 oz./in.
 release linerDouble-sided, silicon-coated 80 lb. bleached Kraft liner 0.114mm (0.0045") thick

Usage Instructions

- Place within 7.6 cm (3 ") of bar code.
- Place in least conspicuous location.
- Do not cover warnings, expiration dates or important consumer information.
- Label placement should be in accordance with Source Tagging Guidelines.
- It is recommended that the surface to which the label is applied be clear and free of all dirt, grease, oil, etc.
- Ambient magnetic field of labeled product greater than 100mG may result in reduced label performance.
- Label not to exceed temporary magnetic field exposure greater than 8 Gauss.
- Source tagged products should be submitted to Sensormatic for label placement approval.